

Objective Evaluation of Edge Blur and Ringing Artefacts: Application to JPEG and JPEG 2000 Image Codecs

G. A. D. Punchihewa, D. G. Bailey, and R. M. Hodgson

Institute of Information Sciences and Technology, Massey University, New Zealand

Email: g.a.punchihewa@massey.ac.nz

Abstract

This paper presents a method of objective evaluation of the edge blur and ringing artefacts produced by image codecs. It is difficult to detect and measure individual artefacts in coded images. A synthetic test image is developed to separate and measure edge blur and ringing artefacts due to image compression. The influence of pixel intensity gradient on the quality metrics is investigated, the test image has also been optimised to enhance sensitivity. The performance of five JPEG and JPEG2000 codec implementations is compared. All five codecs show an increasing level of artefacts with increasing compression ratio. Different implementations of a codec have different artefact characteristics. The objective quality measures can be used in the image codec development process and in parameter optimisation of codec performance. These metrics can also be used to select suitable parameters for video codecs such as MPEG-1, MPEG-2 and MPEG-4 when creating video streams for the Internet applications and in multimedia applications in general.

Keywords: Blur, ringing, artefacts, objective assessment, image quality, quality metric

1 Introduction

In digital television broadcasting, video streaming and other multimedia communications, images and video are the dominant components. With limited communication bandwidth and storage capacity in terminal devices, it is necessary to reduce data rates using digital codecs. The techniques and quantisation used in image and video compression codecs introduce distortions known as artefacts. *The Digital Fact Book* defines artefacts as “particular visible effects, which are a direct result of some technical limitation” [1]. Artefacts are generally not readily evaluated by traditional methods of signal evaluation. For instance, the visual perception of contouring in a picture cannot be related to signal-to-noise ratio [1].

High levels of compression result in undesirable spurious features and patterns in the reconstructed image; these are the artefacts defined above. Image compression schemes such as JPEG use the techniques of discrete cosine transform (DCT), block processing and quantisation. JPEG2000 uses wavelet transformation and quantisation. Figure 1 shows some of the resulting artefacts, namely blur, ringing and blockiness in coded images [2].

When the original signal is not fully known, quantifying artefacts is difficult. In particular, it is difficult to isolate the specific artefacts. However other researchers have developed quality metrics based on non-referenced or reduced reference

techniques [3, 4]. They are good for in-service measurements and as estimates. If the original image is unknown it is often difficult to determine the presence and extent of artefacts. Image codec development, parameter tuning and benchmarking all require the availability of more accurate and swifter measurements. There is considerable benefit in using synthetic images having known spatial distributions of pixel values designed to emphasise the artefacts to be assessed. This study, concentrates primarily on two coding artefacts, namely edge blur and ringing.

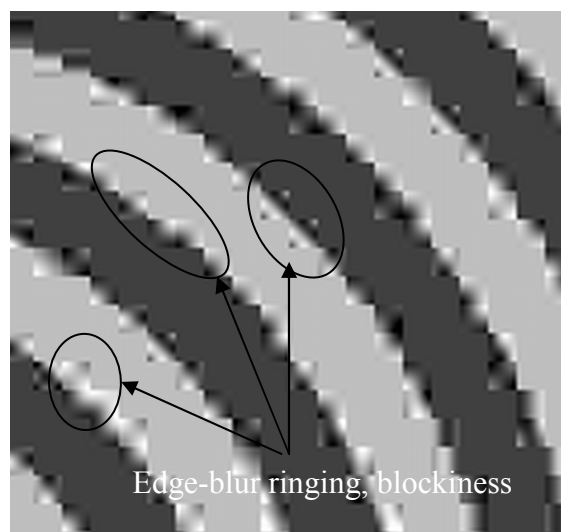


Figure 1. Example of blur and ringing resulting from JPEG codec at high compression ratio.

2 Objective Quality metrics

Peak signal-to-noise ratio (PSNR) and mean square error (MSE) are commonly used as objective quality measures. They are not good indicators of artefacts present since PSNR and MSE are a global pixel error calculation, and do not separately measure artefacts. Yao et al. presented a blurring distortion measure based on the full reference approach and computed the correlation between the original and error image edges [5]. However the method does not distinguish blur and ringing which in general may occur concurrently. The authors have already developed objective quality metrics and synthetic test images for evaluation of blockiness and colour bleeding artefacts [6, 7]. A search of the literature did not reveal any objective quality metric for ringing or edge blur using synthetic test images.

3 Methodology

The aim of this research was to make use of a concentric circles synthetic test image to evaluate the performance of JPEG and JPEG2000 codecs. The test image has been design such that the spatial distribution of pixel values will emphasise edge blur and ringing artefacts due to codec operation [6]. Many image compressors have a control parameter, the quality factor, that can be set by the user to adjust the compression ratio. In general the lower the quality factor the higher the compression ratio and the more visible artefacts become. At low compression ratios, the artefacts may not be obvious or apparent to the human eye.

3.1 Definition of Quality metrics

Ringing always occurs at edges and blur generally occurs at edges. Since we are concerned with the blur occurring at edge, the rest of this paper concentrates on edge blur.

Ringing is an undesirable visible effect around edges. Many codecs transform the pixel values into the frequency domain where the transformed coefficients are then quantised. Quantisation errors resulting from this approach give rise to ringing around sharp discontinuities in the image.

A sharp edge contains components at all frequencies. Any change in the relative amplitudes of any of the components will result in ripples in the image with amplitude corresponding to the error.

As a result of energy compaction in a codec small high frequency components get quantised to zero.

This loss of high frequency components leads to blur in the reconstructed image.

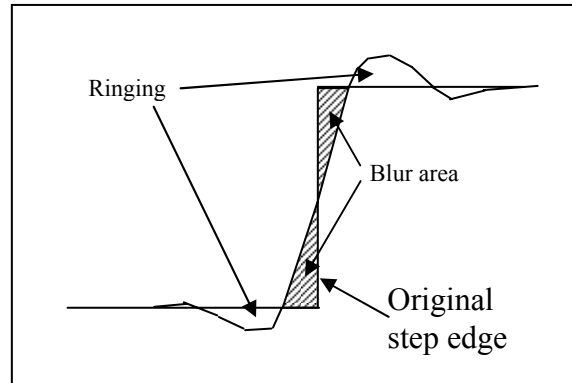


Figure 2. Ringing and edge blur at an edge of a one-dimensional signal.

Ringing and edge blur are defined in Figure 2. We define the region between the first crossings on each side of the edge transition as the edge blur region. Outside of this, from the start of the first overshoot on each side, the errors are classified as ringing.

To obtain a measure of edge blur, consider the shaded area in Figure 2. The greater the blur, the larger will be the shaded area. By dividing the area by the step height h , a measure of average blur width can be obtained. In a similar manner, the area between the ringing signal and ideal signal provides a measure of the severity of ringing. The measures can be normalised by dividing the average measures by the number of edge pixels N . With sampled data, an ideal step edge would involve a transition between two pixels, as illustrated by the circles in Figure 3.

The crosses in Figure 3 are the pixel values near the edge of the reconstructed image from a codec. The transition involves many pixels and pixel values may oscillate around each level of pixel values.

The edge blur and ringing quality metrics may therefore be quantified as,

$$Edge \ blur = \frac{\sum_{blur \ region} |Error|}{N \times h} \quad (1)$$

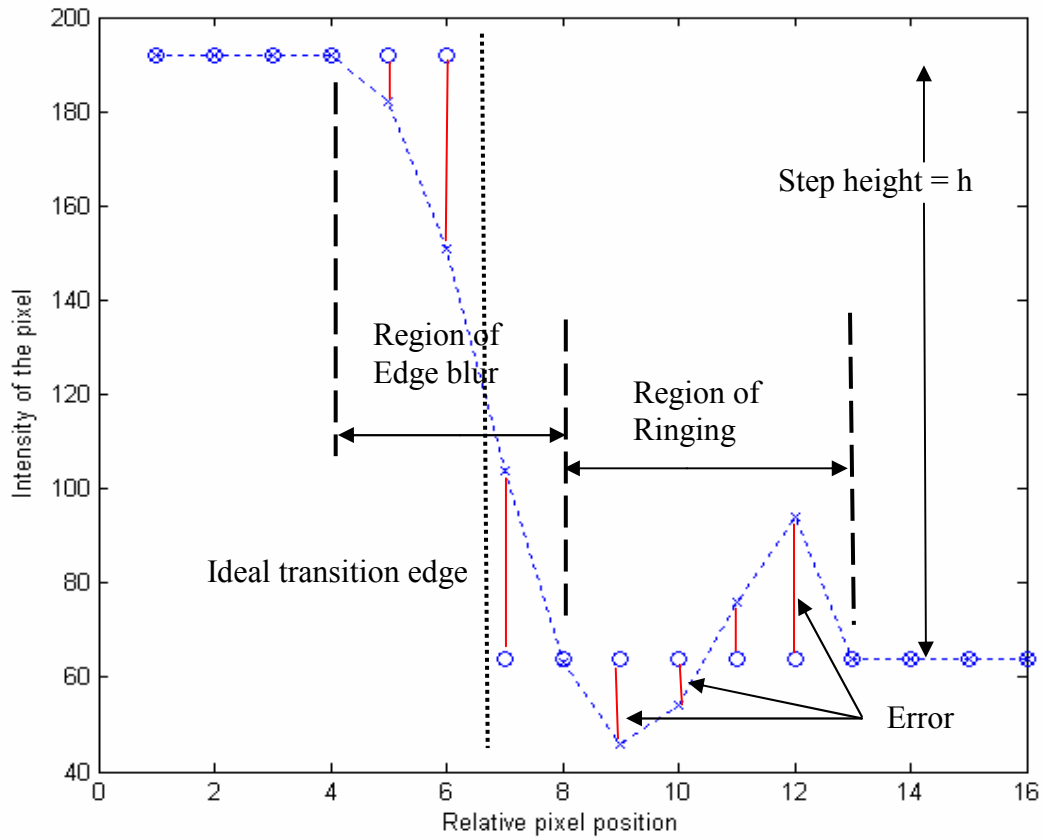


Figure 3. Edge blur and ringing for one-dimensional sampled data. Circles represent original pixel value and cross represent reconstructed pixel value.

$$Ringing = \frac{\sum_{ringing\ region} |Error|}{N \times h} \quad (2)$$

In 2-D images, edges may appear at any orientation. Therefore we consider edge blur and ringing perpendicular to the edge under consideration. By summing the separate errors of individual artefacts over whole image and normalising by the number of edge pixels and step size as given in equations (1) and (2), we can obtain a measure of edge blur and ringing per edge pixel.

3.2 Design of the test signal

To test for edge blur and ringing it is necessary to have step edges within the image. These should include edges of all orientations in order to detect

any orientation sensitivity inherent in the codec. A circular pattern contains edges of every orientation. Initially, pixel values of 64 and 192 have been chosen on either side of the boundary, so that after reconstruction there is adequate amplitude margin to allow for ringing in the reconstructed image. To allow for more edges and resulting error pixels, concentric circles have been incorporated (see Figure 4a and 4b). The spacing has been chosen as a prime number (for example, spacing of 29) so that if block processing is used, the edges fall at different places within individual blocks.

The synthetic test image has been designed to emphasise visible edge blur and ringing artefacts. The pixel values and the shape of the pattern have been carefully chosen so that the algorithm can detect coding artefacts completely and adequately.

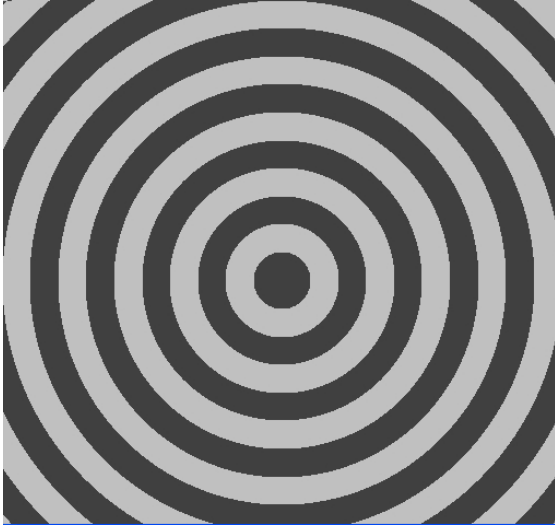


Figure 4(a). Original concentric circles synthetic test image

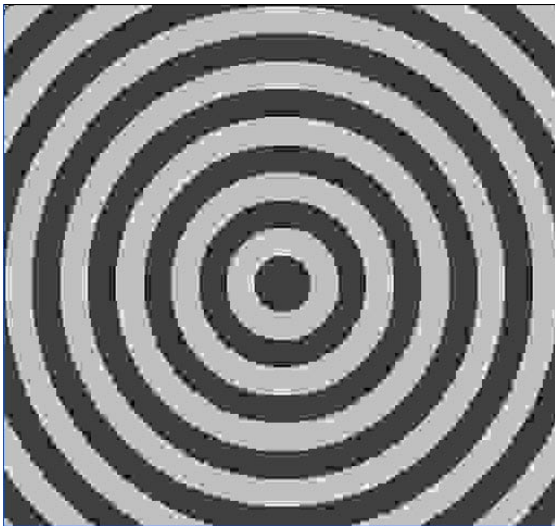


Figure 4(b). Reconstructed concentric circles synthetic test image with blur and ringing artefacts at edges

4 Results

The quality metrics were evaluated by applying the synthetic test image described in the previous section. A JPEG codec was tested at a range of step heights. A set of five JPEG and JPEG2000 codecs were tested at a range of compression ratios.

4.1 Impact of step height on edge blur and ringing

The loss of high frequency components results in ringing around discontinuities and a spread of the transition region. The variation of edge blur and ringing were investigated under different step heights by evaluating the quality metrics for a quality factor of 20 using a JPEG codec. This experiment was then repeated for many quality factor values between 1

and 100. A general observation is that with increasing quality factor, edge blur and ringing demonstrated similar trend of rapid decrease with increasing step height, and decrease in absolute values over the decreasing quality factors. The Figure 5 and Figure 6 show the metrics evaluated on a JPEG codec at a quality factor of 20.

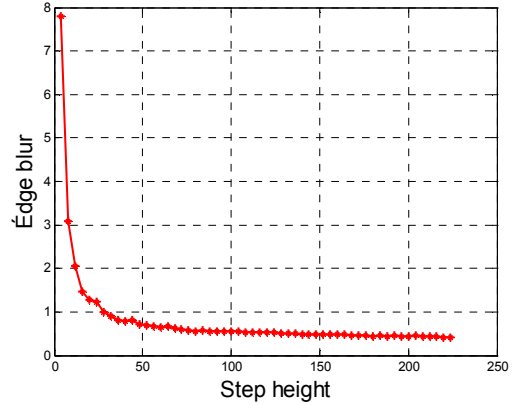


Figure 5: The variation of Edge blur with step height for a JPEG codec at quality factor of 20.

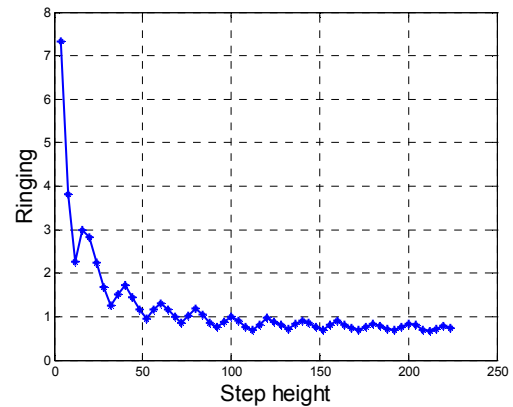


Figure 6: The variation of ringing with step height for a JPEG codec at quality factor of 20.

It was observed that ringing errors are not monotonic because of a threshold effect. As the step height is changed, the dominant components move from one quantisation band to another, with consequent differences in the level of ringing. The low step heights resulted in smaller errors, however, because of quantisation, these errors become more significant relative to the step height. Therefore, when normalised, the results become almost random. When averaged over the whole image this results in the large measures seen. At the other end, for very high steps, there is inadequate range available to adequately represent the ringing in reconstructed values. Hence 64 and 192 were set as optimised pixel intensities of the synthetic concentric test image.

4.2 Performance comparison of JPEG and JPEG2000 codecs

It is observed that ringing and edge blur tend to increase with increasing compression ratio. This is evident in Figures 7 to 12. JPEG codec 2 and codec 3 perform with similar objective quality where as codec 1 introduces the same level of artefacts as codecs 2 and 3 at much lower compression ratios. Hence for a given degree of artefacts, JPEG codecs 2 and 3 could yield a higher level of compression (approximately four fold increase than JPEG codec 1) as shown in Figure 7 and Figure 8. At some compression levels, ringing errors may actually reduce for higher compression depending on exactly where quantisation levels fall.

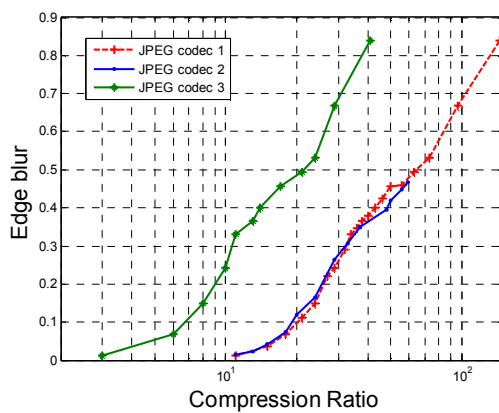


Figure 7: Comparison of three JPEG codecs for edge blur against compression ratio.

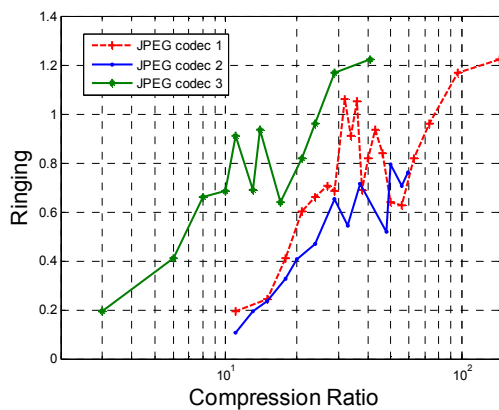


Figure 8: Comparison of three JPEG codecs for ringing against compression ratio.

Figures 9 and 10 show the edge blur and ringing resulted from two JPEG2000 codecs. Both implementations are similar in relation to edge blur. At high compression ratios JPEG2000 codec 1 performs better. At maximum compression, the

ringing artefact introduced by codec 2 decreases in Figure 10 because of severe quantisation.

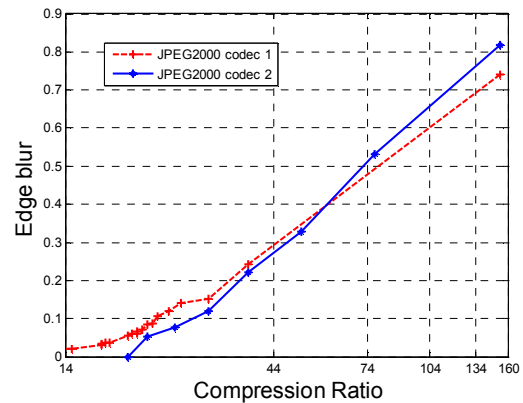


Figure 9: Comparison of two JPEG2000 codecs for edge blur against compression ratio.

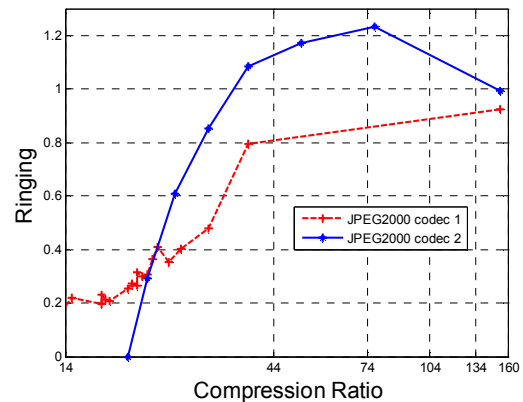


Figure 10: Comparison of two JPEG2000 codecs for ringing against compression ratio.

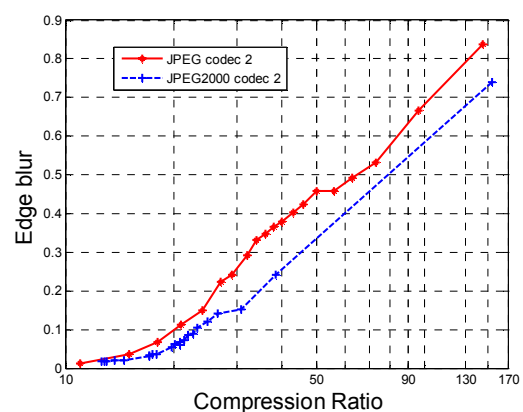


Figure 11: Comparison of JPEG and JPEG2000 codecs for edge blur against compression ratio.

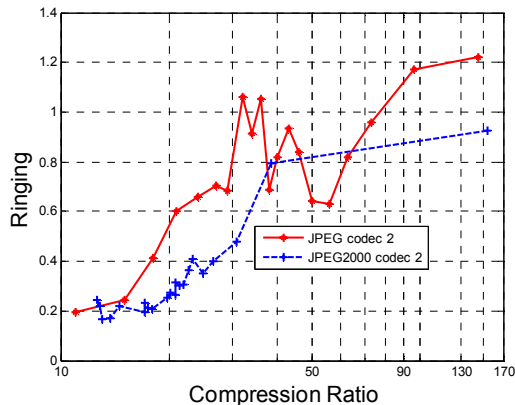


Figure 12: Comparison of JPEG and JPEG2000 codecs for edge blur vs. compression ratio.

Figures 11 and 12 compare the JPEG and JPEG2000 codecs from a single codec developer. The JPEG2000 codec resulted in a lower level of ringing and blur than the JPEG codec, resulting in better picture quality.

5. Conclusions

Edge blur and ringing are an undesirable visible effects found around edges of reconstructed, digitally coded images. In this paper an objective performance comparison of several JPEG and JPEG2000 codecs for edge blur and ringing artefacts is presented. The approach is based on a known test pattern and measurements of the strength of each artefact in the spatial domain. The quality metrics are good representation of artefacts and are swift to calculate. The two measures clearly distinguish between the two artefacts. The concentric circles test image was designed with knowledge of the specific mechanisms and weaknesses inherent in transform coding. The concentric circles test image can be used to evaluate edge and ringing produced by either block based or wavelet based codecs.

Edge blur and ringing were present in reconstructed images from both types of codecs. For low compression ratios, both JPEG and JPEG2000 codecs perform in similarly. Based on the concentric circles test image, it is observed that edge blur and ringing decrease with increasing step height. Thus pixel intensities need to be set in the synthetic image such that the reconstructed image enables measurable quantities for the metric values. An optimised concentric circles test image resulted in increases in edge blur and ringing with increasing compression ratio. The higher the level of compression, the higher the loss of each of high frequency components of the frequency transforms.

Since video codecs use wavelets or DCT for intra-frame coding, the synthetic test image and the two

quality metrics described here can also be applied to evaluate the performance of video codecs.

The concentric circles test image is proved to be useful over a wide range of compressions (compression ratio of 2 to 150). The test image has been designed and optimized with knowledge of the specific mechanisms and weaknesses inherent in compression algorithms. At very high compression ratios other artefacts such as blockiness and global blur become prominent. The authors intend to perform further research to investigate the applicability of the concentric circles test image for global blur and to develop a new quality metric for global blur.

6. References

- [1] B. Pank, *The Digital Fact Book*. Berkshire: Quantel Limited, 2002, p. 28.
- [2] A. Punchihewa and D. G. Bailey, Artefacts in Image and Video Systems; Classification and Mitigation, *Proceedings of Image and Vision Computing New Zealand 2002*, pp. 197-202, 2002.
- [3] A. Punchihewa, D. G. Bailey and R. M. Hodgson, A Survey of Coded Image and Video Quality Assessment, *Proceedings of Image and Vision Computing New Zealand 2003*, pp. 326-331, 2003.
- [4] M.C.Q Farias, M. S Moore, J. M Foley, and S. K.Mitra, Detectability and Annoyance of Synthetic Block and Blurry Video Artefacts, *Proceedings of XI European Signal Processing Conference, France, 2000*.
- [5] S. Yao, W. Lin, Z. Lu. EP. Ong and M. Etoh, Objective Quality Assessment for Compressed Video, *Proceedings of the International Symposium on Circuits and Systems*, pp. 688-691, 2003.
- [6] A. Punchihewa, D. G. Bailey and R. M. Hodgson, Objective Quality Assessment of Coded Images: The Development of New Quality Metrics, *Proceedings of Internet, Telecommunication Conference, Adelaide, Australia*, pp1-6, 2004.
- [7] A. Punchihewa, D. G. Bailey, and R. M. Hodgson, The Development of a Novel Image Quality Metric and a Synthetic Colour Test Image for Objective Quality Assessment of Digital Codecs, This paper has been accepted for publication by *IEEE TENCON 2005 Telecommunication Conference, Melbourne, Australia*, 21-23 November 2005.